

# Definition of BEMIS SEQ001 Import and Export File for Business Document Type Sequence Shipping Schedule



---

Copyright © 2009 Infor

All rights reserved. The word and design marks set forth herein are trademarks and/or registered trademarks of Infor and/or related affiliates and subsidiaries. All rights reserved. All other trademarks listed herein are the property of their respective owners.

### Important Notices

The material contained in this publication (including any supplementary information) constitutes and contains confidential and proprietary information of Infor.

By gaining access to the attached, you acknowledge and agree that the material (including any modification, translation or adaptation of the material) and all copyright, trade secrets and all other right, title and interest therein, are the sole property of Infor and that you shall not gain right, title or interest in the material (including any modification, translation or adaptation of the material) by virtue of your review thereof other than the non-exclusive right to use the material solely in connection with and the furtherance of your license and use of software made available to your company from Infor pursuant to a separate agreement ("Purpose").

In addition, by accessing the enclosed material, you acknowledge and agree that you are required to maintain such material in strict confidence and that your use of such material is limited to the Purpose described above.

Although Infor has taken due care to ensure that the material included in this publication is accurate and complete, Infor cannot warrant that the information contained in this publication is complete, does not contain typographical or other errors, or will meet your specific requirements. As such, Infor does not assume and hereby disclaims all liability, consequential or otherwise, for any loss or damage to any person or entity which is caused by or relates to errors or omissions in this publication (including any supplementary information), whether such errors or omissions result from negligence, accident or any other cause.

### Trademark Acknowledgements

All other company, product, trade or service names referenced may be registered trademarks or trademarks of their respective owners.

### Publication Information

**Document code:** U9448B US

**Release:** ERP LN 6.1 Electronic Commerce

**Publication date:** November 09

---



---

# Table of Contents

<b>Chapter 1</b>	<b>General Principles .....</b>	<b>1-1</b>
	Available types of data records .....	1-1
	Branching diagrams .....	1-2
	Key fields outgoing.....	1-3
	Key fields incoming .....	1-4
	Business partner relations.....	1-4
	Network directories .....	1-5
	ERP LN BEMIS messages – conventions.....	1-7
	What is new in comparison to BEMIS for BAAN V? .....	1-8
	What is new in comparison to BEMIS for Feature Pack 3 for Infor ERP LN 6.1?.....	1-9
<b>Chapter 2</b>	<b>Data Record Description by Type of Data Record .....</b>	<b>2-1</b>
	SA1 Message Overhead .....	2-1
	SA2 Release Header .....	2-9
	SA3 Sequence Shipping Details .....	2-21
<b>Chapter 3</b>	<b>Definitions, Acronyms, and Abbreviations.....</b>	<b>3-1</b>
<b>Appendix A</b>	<b>Sample File .....</b>	<b>A-1</b>

---



---

## About this Guide

### Objective

This document describes the content and the corresponding structure of the EDI message “Sequence Shipping Schedule”, which is supported by Baan Electronic Message, the ERP LN in-house format.

The message’s content refers to the following origin message types and gives their attribution to the transferred ASCII file of the BEMIS format:

- EDIFACT DELJIT
- ANSI X12 866
- VDA 4916

The message structure is defined by referring to incoming directions and outgoing directions.

The document contains the following chapters:

Chapter 1, “General Principles”, provides a general introduction to the EDI in-house format for the Business Document type Sequence Shipping Schedule.

Chapter 2, “Data Record Description by Kind of Data Record”, describes in detail the data records used for the EDI in-house format of EDI message Sequence Shipping Schedule.

Chapter 3, “Definitions, Acronyms, and Abbreviations”, provides a glossary of terms used in Infor ERP LN and in this document, and also a list of abbreviations.

Appendix A, “Sample File”, provides a sample file for the outgoing message SEQ001.

---

## Intended audience

This document is intended for the following categories of users:

- Users who want to understand what the processed information of the EDI messages in ERP LN are.
- Users who develop the translation from external EDI format to the in-house format.

## References

The following documents might be of importance:

No.	Document number	Title
1	U8912A US	<i>User's Guide for BEMIS</i>
2	U8998A US	<i>User's Guide for EDI Business Documents</i>
3	U9443B US	<i>Definition of BEMIS MRL001 Import and Export File...</i>

## Send us your comments

We continually review and improve our documentation. Any remarks/requests for information concerning this document or topic are appreciated. Please e-mail your comments to [documentation@infor.com](mailto:documentation@infor.com).

In your e-mail, refer to the document code and title. More specific information will enable us to process feedback efficiently.

---



---

# Chapter 1

## General Principles



### Available types of data records

This section describes the EDI In-house format for the Business Document type Sequence Shipping Schedule (incoming/outgoing). When you transmit information about sequence shipping schedules, the use of the following types of data records is conditional (C) or respectively mandatory (M).


<b>ID</b>	<b>Status</b>	<b>Name</b>
SA1	M	Global Overhead
SA2	M	Release Header
SA3	M	Sequence Shipping Details

---

## Branching diagrams

The following data record structure is used for the BEMIS message type Sequence Shipping Schedule:

Level

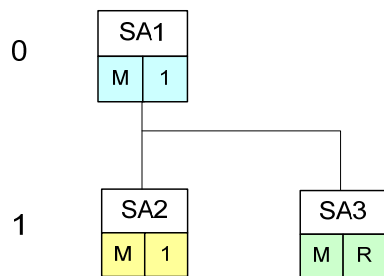

Legend:

Status:

M: mandatory in message

C: conditional in message

Frequency:

1: once by message

R: repeatable by message

For example, for two required SEQ releases with each several sequence shipping details the BEMIS file has the following structure:

SA1 ... Global Overhead

SA2 ... Release Header 1

SA3 ... Sequence Shipping Details 11

SA3 ... Sequence Shipping Details 12

SA3 ... Sequence Shipping Details 13

...

SA3 ... Sequence Shipping Details 19

- SA1 ... Global Overhead
- SA2 ... Release Header 2
- SA3 ... Sequence Shipping Details 21
- SA3 ... Sequence Shipping Details 22
- SA3 ... Sequence Shipping Details 23

## Key fields outgoing

The outgoing message refers to the Buy-from-BP and the Purchase Schedule Release. The following structure of the key fields is used to determine the corresponding data records of a Sequence Shipping Schedule message:

Sorted by Key						
Kind	Data	Rec.	key 1	key 2	key 3	key 4
field 1	Backpt					
SA1			Message ref.	BP net ID		
SA2	1		Message ref.	BP net ID		
SA3	2		Message ref.	BP net ID	Release	Release revision

## Key fields incoming

The incoming message refers to the Sold-to-BP and the Sales Schedule Releases. The following structure of the key fields is used to determine the corresponding data records of a Sequence Shipping Schedule message:

Sorted by Key					
Kind	Data Rec.	key 1	key 2	key 3	key 4
field 1	Backpt				
SA1		Message ref.	BP net ID		
SA2	1	Message ref.	BP net ID		
SA3	2	Message ref.	BP net ID	Release	Release Revision

## Business partner relations

The following table shows the business partner relations:

Outgoing Schedule Releases		Incoming Schedule Releases	
ID of the sender	ecedi020.neta	Sold-to BP Code	tdsls312.ofbp
Ship-From BP-Code	tdpur320.sfbp	Warehouse Code	tdsls316.cwar
Warehouse Code	tdpur320.cwar	Ship-to BP Code	tdsls312.stbp
Ship-to Address Code	tdpur320.stad	Ship-to Address Code	tdsls312.stad

## Network directories

In the Direct Network Communication (ecedi7205m000) session, the user can receive and generate EDI messages.

As written in the User's Guide EDI Business Document [2], the communication is done between the EDI Sub-System and ERP LN to transfer the message's ASCII files across the specific network. This communication is based on the network directories that are established in ERP LN.

The network basis directories for each network will be defined in the ecedi0120m000 session.

The ERP LN user can decide the structure of the used network directories, such as the following:

- For every message type, one network directory can be used for outgoing messages and one can be used for incoming messages. This means that one message file contains data for several business partners.
- For a group of message types, such as schedules, one network directory can be used for outgoing messages and one can be used for incoming messages.
- Every business partner can use their own network directory, and the files would be able to contain data for several messages types.

We recommend using the first possibility or the second possibility if the SEQ001 specifies a previous Material Release [3].

For the network BEMIS, for example the basis directories can be indicated in the following way:

- /\${BSE}/edi /bemis/schedule/
-

ERP LN will additionally create the following subdirectories:

- `/${BSE}/edi/bemis/schedule/appl_from/`
- `/${BSE}/edi/bemis/schedule/appl_to/`
- `/${BSE}/edi/bemis/schedule/command/`
- `/${BSE}/edi/bemis/schedule/store_rcv/`
- `/${BSE}/edi/bemis/schedule/store_sent/`
- `/${BSE}/edi/bemis/schedule/trace/`

The above mentioned directories refer to one message type, “sequence shipping schedule”. The directories have the following functions:

- **.../appl\_from/:** In this directory, ERP LN records the outgoing messages that are the defined BEMIS in-house format files. The EDI Subsystem can collect them from here.
- **.../appl\_to/:** The EDI Subsystem writes the incoming message into this directory in the ERP LN in-house format.
- **.../command/:** A directory of the semaphores.
- **.../store\_rcv/:** ERP LN stores processed incoming messages in this directory, if the corresponding EDI parameter is set in this way. During this process, an additional subdirectory by incoming message file is created; the subdirectory is named with a date and time stamp that indicates when the message was moved.
- **.../store\_sent/:** ERP LN stores processed outgoing messages in this directory, if the corresponding EDI parameter is set in this way. During this process, an additional subdirectory by incoming message file is created; the subdirectory is named with a date and time stamp that indicates when the message was moved.
- **.../trace/:** ERP LN creates a log of the incoming messages and outgoing messages in the processing order in this directory, if the corresponding EDI parameter is set in this way.

The file name of the BEMIS in-house format files of the sequence shipping schedule, which is being described in this documentation, is defined in the following way:

Direction	File Name	Network Directory
outgoing	SEQ001	<code>/\${BSE}/edi/bemis/schedule/appl_from</code>
incoming	SEQ001	<code>/\${BSE}/edi/bemis/schedule/appl_to</code>

---

## ERP LN BEMIS messages – conventions

Written in the User’s Guide for BEMIS [1], we use the following rules to structure the EDI message:

- Each data segment is defined by a unique code in an EDI message. The format of the data segment code is SA99. Each segment (message record) starts with the unique code “Sax”; the message record ends with “SAx\_END”.
- The length of the several data segments can vary.
- Even if some fields do not contain a value, each data segment (message record) must consist of all fields.
- The fields in the file must be separated by a defined sign, such as a semicolon (;)
- A filled string field must be put inside quotation marks (“...”).
- If a position in a BEMIS Message File is not taken by a value, which means that the position is empty, then the position is pointed out using two semicolons. Also, the ERP LN EDI Module distinguishes between numerical data and alphanumerical data format, as shown in the following examples:

Empty numerical Position:       “SAx”; ... ; ; ... ;”SAx\_END”

Empty alphanumerical Position: Infor differs between the following, in case the field exists in the LN database:

“SAx”; ... ; ; ... ;”SAx\_END”   and   “SAx”; ... ; “”; ... ;”SAx\_END”

In the following sections are the format descriptions of the individual types of data segments (message records) of the interface file. The table contains the following data:

### SCHEDULE IN-HOUSE FORMAT

Pos	Field description	Key	ST	FM
-----	-------------------	-----	----	----

The first block of the table describes the format of a type of data record:

Pos                           Position of the field in the data record

Field description   Description of the field

Key	Key field outgoing (O) / incoming (I)
ST	Field status mandatory (M) / conditional (C)
FM	Field format, for example. an..14 = alphanumerical field with a maximum of 14 characters an14 = alphanumerical field with exactly 14 characters n..10 = numerical field with a maximum of 10 characters n1 = numerical field with exactly 1 character

The second block of the table describes the corresponding table field in ERP LN and describes possible special actions, which will be carried out when the messages are being processed.

**from Application Table Field (out) / Mapping to Table Field (in)**

Table Field	Action

---

Following the table overview, every field is described in a more detailed way, including information about the processing in the EDI Sub-System and in ERP LN.

Consider one exception: if a position of the data record is not currently used, then Infor omits the detailed description of this empty position.

## What is new in comparison to BEMIS for BAAN V?

The EDI Delivery Just in Time Message referring to the EDIFACT DELJIT could not be processed in Baan V standard software.

The ERP LN includes the EDI Schedule processing similarly to the Delivery and both the Shipping Schedule and the Production Sequence Schedule application of the Baan IV SCH / SCC / AGS versions.

Additionally the ERP LN In-house format considers the processing of several schedule's releases. The release gives a possibility to collect several schedules and to track the transferred schedules of a Business Partner.

---



The covering is done by the mandatory data record SA2 in SEQ. A schedule release is only used for the EDI processing.

## What is new in comparison to BEMIS for Feature Pack 3 for Infor ERP LN 6.1?

The new version is based on the version for Feature Pack 3 for Infor ERP LN 6.1 and can only be used up from Feature Pack 6 for ERP LN 6.1.

The new defaults for Incoming direction are now based on release table (tdsls316).

### Changes SA3 – Sequence Shipping Details

<b>Field Number</b>	<b>Outgoing</b>	<b>Incoming</b>
42 – new	NA	tdsls316.dlpt
45 - new	SA3_END old position was 42	NA



# Chapter 2

## Data Record Description by Type of Data Record

### SA1 Message Overhead

Status: Mandatory

Frequency: Once by Release

Description: This data record contains information about the transmitter, the message type and the time of the transmission. The message reference identifies all related data records of this message.

SEQ In-house Format					Mapping from Application Table Fields (out)		Mapping to Application Table Fields (in)	
Pos	Field Description	Key	ST	FM	Table field	Action	Table field	Action
1	Kind of data record	O/I	M	an3	SA1		SA1	
2	Message Reference	O/I	M	an..35	ecedi701.bano	Generation (see below)	ecedi702.bano	Generation by EDI Sub-System
3	Net ID of Sender	O/I	M	an..17	ecedi020.neta	Conversion (see below)	ecedi702.bpid	Conversion (see below)

SEQ In-house Format					Mapping from Application Table Fields (out)		Mapping to Application Table Fields (in)	
Pos	Field Description	Key	ST	FM	Table field	Action	Table field	Action
4	Net ID of Receiver		M	an..17	ecedi028.neta	Conversion (see below)		
5	Message		M	an..6	ecedi001.code	Conversion (see below)	ecedi702.mess	Conversion (see below)
6	Organization		M	an..6	ecedi003.code	Conversion (see below)	ecedi702.orga	Conversion (see below)
7	Order type		M	an..35	empty (...;;...)		ecedi702.koor	
8	Transmission reference		M	an..20	ecedi700.orno		ecedi702.msno	
9	Date / Time of transmission		M	n..14	current date / time		ecedi702.sent	
10	Transmission Reference old		C	an..20	empty (...;;...)		ecedi702.prno	
11								
12	Identifier of Test		C	an1	ecedi003.test	Empty means original message.	ecedi702.test	
13	Data record end sign		M	an7	SA1_END		SA1_END	

Detailed description: Sequence Shipping Schedule  
 Kind of data record: SA1 Message Overhead

Position	1	Field Format	an3	Field Status	M
Field Name	<u>Kind of Data Record</u>		Key field Out / IN		
Description	This field identifies the kind of data record in the message block. It contains the constant value 'SA1'.				
Processing outgoing EDI Sub-System					
ERP LN	This field will be filled with the constant value 'SA1'.				
Processing Incoming EDI Sub-System	This field will be filled with the constant value 'SA1'.				
ERP LN	None				

Position	2	Field Format	an..14	Field Status	M
Field Name	<u>Message Reference</u>		Key field Out / IN		
Description	<p>This field identifies all connected data records of one Sequence Shipping Schedule. The numbering, which has to be clear by SEQ, helps to control the chronological order of the SEQ and the complete transmission. The field consists of a fix item with four characters, the current date (format: YYYYMMDD) and a serial number with four characters.</p> <p>The special format will be defined in the network parameters in the ERP LN table ecedi020. When generating the message reference with the EDI Sub-System, the created message reference needs to be specific, which means unique. While storing the message reference ERP LN controls whether it is specific.</p>				
Processing outgoing EDI Sub-System					
ERP LN	ERP LN generates this number to identify an SEQ, stores it in the ERP LN table field ecedi701.bano and writes it into all data records of a SEQ.				
Processing Incoming EDI Sub-System	The EDI Sub-System generates this number to identify a SEQ and writes it into all data records of a Sequence Shipping Schedule.				
ERP LN	Mapping to ERP LN table field ecedi702.bano.				

Position	3	Field Format	an..17	Field Status	M
Field Name	<u>Net ID of sender</u>		Key field Out / In		
Description	This field contains the identification of the sender (for example the ILN Number)				
Processing outgoing EDI Sub-System	Transmission of the value from the message file.				
ERP LN	The identification is stored in the ERP LN table ecedi020 'Our Identification' under the corresponding network in the ERP LN table field ecedi020.neta. The content of this field is mapped to the position of the transmission file. Here you can store the general ILN-Number for your customer.				
Processing Incoming EDI Sub-System					
ERP LN	The identification of the sender determines the corresponding business partner (customer) and the network in the table ecedi028 'Relations by network'. This identification is mapped to the ERP LN table field ecedi702.bpid.				

Position	4	Field Format	an..17	Field Status	M
Field Name	<u>Net ID of Receiver</u>				
Description	This field contains the identification of receiver.				
Processing outgoing EDI Sub-System					
ERP LN	The identification of the receiver (for example the ILN of the receiver) in the used network is entered in the table ecedi028. The ELP LN table field ecedi028.neta is mapped to this position.				
Processing Incoming EDI Sub-System	Transmission of the value from the message file.				
ERP LN	On the incoming side this field will be ignored.				

---

Position	5	Field Format	an..6	Field Status	M
<b>Field Name</b>	<b><u>Message</u></b>				
Description	This field contains the code for the identification of the concerned message. The code for the message type 'Sequence Shipping Schedule' is SHP001.				
Processing outgoing EDI Sub-System	.				
ERP LN	The internal message code ecedi001.code 'SEQ001' of the ERP LN table ecedi001 'Supported EDI messages' is mapped to this position.				
Processing Incoming EDI Sub-System	This field will be filled with the constant value 'SEQ001'.				
ERP LN	The message code in the table ecedi001 'Supported EDI Messages' determines which internal message in ERP LN is connected to this SEQ. In the ERP LN table ecedi005 'EDI Messages' is determined for every message which session (DLL) is used in ERP LN to process the message. The message code is mapped to the ERP LN table field ecedi702.mess.				

Position	6	Field Format	an..6	Field Status	M
<b>Field Name</b>	<b><u>Organization</u></b>				
Description	This field contains the organization (Standard), which is used for the EDI communication.				
Processing outgoing EDI Sub-System					
ERP LN	The internal organization code ecedi003.code 'BEMIS' from the ERP LN table ecedi003 'Organizations' is mapped to this position.				
Processing Incoming EDI Sub-System	This field will be filled with the constant value 'BEMIS'.				
ERP LN	Mapping to ERP LN table field ecedi702.org. The corresponding Organization must have been entered into the ERP LN table ecedi003.				

Position	7	Field Format	an..35	Field Status	M
<b>Field Name</b>	<b><u>Order Type</u></b>				
Description	This field contains a code for the concerned order type; the field is empty referring to the outgoing message SEQ001.				
Processing outgoing EDI Sub-System					
ERP LN	None				
Processing Incoming EDI Sub-System					
ERP LN	Mapping to ERP LN table field ecedi702.koor. In the ERP LN table ecedi200 there must be an entry for this order type in connection with the respective message and organization.				

Position	8	Field Format	an..20	Field Status	M
<b>Field Name</b>	<b><u>Transmission Reference</u></b>				
Description	This field contains the reference code which the EDI Sub-System applied to this transmission.				
Processing outgoing EDI Sub-System					
ERP LN	The position will be filled with the schedule release number from ERP LN table field ecedi700.orno				
Processing Incoming EDI Sub-System					
ERP LN	Mapping to ERP LN table field ecedi702.msno.				

---



Position	9	Field Format	n..14	Field Status	M
<b>Field Name</b>	<b><u>Date / Time of Transmission</u></b>				

Description This field contains on the outgoing side the current date / time, on which the SEQ message was created. On the incoming side, this field contains the arrival date / time of the message at the EDI Sub-System (format: YYYYMMDDHHMMSS).

Processing outgoing  
EDI Sub-System

ERP LN Mapping of the current date / time to the position.

Processing Incoming  
EDI Sub-System Entry of the arrival date / time of the message at the EDI Sub-System.

ERP LN Mapping to ERP LN table field ecedi702.send

Position	10	Field Format	an..20	Field Status	C
<b>Field Name</b>	<b><u>Transmission Reference Old</u></b>				

Description This field contains the reference number, which the EDI Sub-System applied to the previous transmission.

Processing outgoing  
EDI Sub-System

ERP LN Not used

Processing Incoming  
EDI Sub-System Transmission of the value from the transmission file.

ERP LN Mapping to ERP LN table field ecedi702.pno.

Position	12	Field Format	an1	Field Status	C
<b>Field Name</b>	<b><u>Identifier of Test</u></b>				

Description This field contains the code that will identify incoming messages for this organization as test messages. A test message is checked, but not copied to the database.

Processing outgoing  
EDI Sub-System

ERP LN The position will be filled with the ERP LN table field ecedi003.test

Processing Incoming  
EDI Sub-System Transmission of the value from the transmission file.

ERP LN Mapping to ERP LN table field ecedi702.test.

Position	13	Field Format	an7	Field Status	M
<b>Field Name</b>	<b><u>Data Record end sign</u></b>				

Description This field identifies the end of data record in the message block. It contains the constant value 'SA1\_END'.

Processing outgoing  
EDI Sub-System

ERP LN This field will be filled with the constant value 'SA1\_END'.

Processing Incoming  
EDI Sub-System This field will be filled with the constant value 'SA1\_END'.

ERP LN None

---

## SA2 Release Header

Status: Mandatory  
 Frequency: Once by Release  
 Description: This data record contains all information of the Release Header and it is related to SA1.

SEQ In-house Format					Mapping from Application Table Fields (out)		Mapping to Application Table Fields (in)	
Pos	Field Description	Key	ST	FM	Table field	Action	Table field	Action
1	Kind of data record	O/I	M	an3	SA2		SA2	
2	Message Reference	O/I	M	an..35	ecedi701.bano	Generation (see below)	ecedi702.bano	Generation by EDI Sub-System
3	(Net) ID of Sender	O/I	M	an..17	ecedi020.neta	Conversion (see below)	tdsls312.ofbp	Conversion (see below)
4	Release No.		M	an..9	tdpur320.rln		tdsls312.crln	
5	Release revision		M	n..4	tdpur320.rlv		tdsls312.crlr	
6	Release type		M	an6	tdpur320.rtyp		tdsls312.rtyp	
7	Transaction set purpose		M	an7	"Replace"			
8	Qualifier Buy-from BP		M	an6	"OFBP"			
9	Buy-from BP		M	an..9	tdpur320.bfbp	Conversion		
10	Qualifier Ship-to BP		M	an6	"STBP"			
11	Ship-from BP		M	an..9	tdpur320.sfbp	Conversion		
12	Ship-to-Address		M	an..6	tdpur320.stad	Conversion	tdsls312.stad	Conversion

SEQ In-house Format					Mapping from Application Table Fields (out)		Mapping to Application Table Fields (in)	
Pos	Field Description	Key	ST	FM	Table field	Action	Table field	Action
13	Shipment/delivery based		M	n1	tdpur320.tqal	Conversion Schedule Type	tdsls312.sodb	Conversion
14	Schedule quantity qualifier		M	an1	"A"		tdsls312.qqal	Conversion
15	Forecast Horizon Start Date		M	n..22	tdpur320.fohs		tdsls312.fohs	
16	Forecast Horizon End Date		M	n..22	tdpur320.fohe		tdsls312.fohe	
17	Generation Date		M	n..22	tdpur320.egdt		tdsls312.egdt	
18	Qualifier Address Code		M	an..6	ZZ		ZZ	
19	Warehouse / Ship-to BP		M	an..6	tdpur320.cwar	Conversion	tdsls312.stpb	Conversion
20	Data Record End Sign	O/I	M	an7	SA2_END		SA2_END	

---

Detailed description: Sequence Shipping Schedule

Kind of data record: SA2 Release Header

Position	1	Field Format	an3	Field Status	M
Field Name	<u>Kind of Data Record</u>		Key field Out / IN		

Description This field identifies the kind of data record in the message block. It contains the constant value 'SA2'.

Processing outgoing  
EDI Sub-System

ERP LN This field will be filled with the constant value 'SA2'.

Processing Incoming  
EDI Sub-System

This field will be filled with the constant value 'SA2'.

ERP LN None

Position	2	Field Format	an..35	Field Status	M
Field Name	<u>Message Reference</u>		Key field Out / IN		

Description This field identifies all connected data records of one Sequence Shipping Schedule. The numbering, which has to be clear by SEQ, helps to control the chronological order of the SEQ and the complete transmission.

Processing outgoing  
EDI Sub-System

ERP LN Analogously to data record SA1

Processing Incoming  
EDI Sub-System

ERP LN Analogously to data record SA1

Position	3	Field Format	an..17	Field Status	M
Field Name	<u>(Net) ID of sender</u>		Key field Out / In		
Description	This field contains the identification of the sender (for example the ILN Number)				
Processing outgoing EDI Sub-System	Transmission of the value from the message file.				
ERP LN	The identification is stored in the ERP LN table ecedi020 'Our Identification' under the corresponding network in the ERP LN table field ecedi020.neta. The contents of this field are mapped to the position of the transmission file. Here you can store the general ILN-Number for your customer.				
Processing Incoming EDI Sub-System					
ERP LN	The identification of the sender determines the corresponding business partner (customer) and the network in the table ecedi028 'Relations by network'. This identification is mapped to the ERP LN table field tdsls312.ofbp. Pos. 18 is used as first qualifier, pos. 8 as second qualifier.				

Position	4	Field Format	an..9	Field Status	M
Field Name	<u>Release Number</u>				
Description	This field contains the origin Release Number of the related schedules.				
Processing outgoing EDI Sub-System	None				
ERP LN	The release number is mapped from ERP LN table field tdpur320.rln0 to this position.				
Processing Incoming EDI Sub-System	Transmission of the value from the message file.				
ERP LN	Mapping to ERP LN table field tdsls312.crln; the customer's release number.				

---

Position	5	Field Format	n..4	Field Status	M
<b>Field Name</b>	<b><u>Release Revision Number</u></b>				

Description This field contains the Release Revision Number.

Processing outgoing  
EDI Sub-System None

ERP LN The revision number is mapped from ERP LN table field tdpur320.rlv to this position.

Processing Incoming  
EDI Sub-System Transmission of the value from the message file.

ERP LN Mapping to ERP LN table field tdsls312.crlr; customer's release revision.

Position	6	Field Format	an6	Field Status	M
<b>Field Name</b>	<b><u>Release Type</u></b>				

Description This field contains the Release Type to identify the kind of schedules.

Processing outgoing  
EDI Sub-System None

ERP LN The Release type equals the type of EDI message. It is mapped from the ERP LN table field tdpur320.rtyp to this position. It contains the numeric value 3 (Sequence Shipping Schedule).

Processing Incoming  
EDI Sub-System Transmission of the value from the message file.

ERP LN Mapping to ERP LN table field tdsls312.rtyp

Position	7	Field Format	an7	Field Status	M
<b>Field Name</b>	<b><u>Transaction set Purpose</u></b>				

Description This field describes the type of the release that is transmitted. It can be of type 'Replace', 'Update', 'Cancel' etc.

Processing outgoing  
EDI Sub-System

ERP LN This field will be filled with the constant value equivalent to 'Replace'.

Processing Incoming  
EDI Sub-System

ERP LN This field will be filled with the constant value equivalent to 'Replace' currently.

Position	8	Field Format	an6	Field Status	M
<b>Field Name</b>	<b><u>Qualifier Buy-from BP</u></b>				

Description This position contains the qualifier to identify the Business partner.

Processing outgoing  
EDI Sub-System None

ERP LN This field will be filled with the constant value "OFBP"

Processing Incoming  
EDI Sub-System Transmission of the value from the message file.

ERP LN Field can be used as qualifier 2 on field tdsIs312.ofbp (field 3).

---



Position	9	Field Format	an..9	Field Status	M
<b>Field Name</b>	<b><u>Buy-from-BP</u></b>		<b>Key field</b>		

Description This position contains the code for the Business Partner where the customer buys its goods.

Processing outgoing EDI Sub-System None

ERP LN The Code for the Buy From Business Partner from ERP LN table field tdpur400.otbp is converted using the conversion table ecedi463 and the default Qualifier "ZZ", and it is mapped to this position.

Processing Incoming EDI Sub-System

ERP LN N. A.

Position	10	Field Format	an6	Field Status	M
<b>Field Name</b>	<b><u>Qualifier Ship-to-BP</u></b>		<b>Key field</b>		

Description This position contains the qualifier to identify the Business partner.

Processing outgoing EDI Sub-System None

ERP LN This field will be filled with the constant value "STBP"

Processing Incoming EDI Sub-System

ERP LN N. A.

Position	11	Field Format	an..9	Field Status	M
<b>Field Name</b>		<b><u>Ship-from-BP</u></b>		<b>Key field</b>	
Description		This position contains the code for the Ship-from / Ship-to Business Partner.			
Processing outgoing EDI Sub-System		None			
ERP LN		The Code for the ship-from Business Partner from ERP LN table field tdpur320.sfbp is converted using the conversion table ecedi463 or the constant "STBP" and the default Qualifier "ZZ", and it is mapped to this position.			
Processing Incoming EDI Sub-System					
ERP LN		N. A.			

Position	12	Field Format	an..6	Field Status	M
<b>Field Name</b>		<b><u>Ship-To Address</u></b>		<b>Key field</b>	
Description		This field contains the ship-to address code.			
Processing outgoing EDI Sub-System		None			
ERP LN		The ship to address code from ERP LN table field tdpur320.stad is mapped to this position. Conversion table is ecedi463. If conversion not found then original value will be sent.			
Processing Incoming EDI Sub-System		Transmission of the value from the message file.			
ERP LN		It is mapped to tdsis312.stad. Conversion table is ecedi363. Position 18 is used as qualifier.			

---

Position	13	Field Format	n1	Field Status	M
<b>Field Name</b>	<b><u>Shipment or delivery based</u></b>		<b>Key field</b>		

Description This field identifies whether the goods need to be picked or delivered. Based on this value the delivery date of the goods will be calculated.

Processing outgoing  
EDI Sub-System

None

ERP LN

This field is mapped from the ERP LN table field ftdpur320.tqal to this position after conversion by the table Schedule type ecedi413. If conversion not found then the original value will be sent.

Processing Incoming  
EDI Sub-System

Transmission of the value from the message file

ERP LN

This field is mapped to table field tdsls312.sodb Conversion table is ecedi351. If conversion not found then error message is given.

Position	14	Field Format	an1	Field Status	M
<b>Field Name</b>	<b><u>Schedule Quantity Qualifier</u></b>		<b>Key field</b>		

Description This field identifies the quantity qualifier of the schedule. It communicates whether the quantity is cumulative or discrete.

Processing outgoing  
EDI Sub-System

None

ERP LN

This field will be filled with the constant value 'A' (actual values = discrete).

Processing Incoming  
EDI Sub-System

Transmission of the value from the message file

ERP LN

This field is mapped to table field tdsls312.qqal. Conversion table is ecedi352. If conversion not found then error message is given. Constant values 'A' and 'C' (cumulative) are allowed values.

Position	15	Field Format	n..22	Field Status	M
<b>Field Name</b>	<b><u>Forecast Horizon Start Date</u></b>		<b>Key field</b>		
Description	This field identifies the start date for the requirements under release				
Processing outgoing EDI Sub-System	None				
ERP LN	This field is mapped from the ERP LN table field tdpur320.fohs to this position.				
Processing Incoming EDI Sub-System	Transmission of the value from the message file				
ERP LN	This field is mapped to table field tdsls312.fohs				

Position	16	Field Format	n..22	Field Status	M
<b>Field Name</b>	<b><u>Forecast Horizon End Date</u></b>		<b>Key field</b>		
Description	This field identifies the end date for the requirements under release				
Processing outgoing EDI Sub-System	None				
ERP LN	This field is mapped from the ERP LN table field tdpur320.fohe to this position.				
Processing Incoming EDI Sub-System	Transmission of the value from the message file				
ERP LN	This field is mapped to table field tdsls312.fohe				

Position	17	Field Format	n..22	Field Status	M
<b>Field Name</b>	<b><u>Generation Date</u></b>		<b>Key field</b>		
Description	This field identifies the release generation date				
Processing outgoing EDI Sub-System	None				
ERP LN	This field is mapped from the ERP LN table field tdpur320.egdt to this position.				
Processing Incoming EDI Sub-System	Transmission of the value from the message file				
ERP LN	This field is mapped to table field tdsls312.egdt				

---

Position	18	Field Format	an..6	Field Status	M
Field Name	<u>Qualifier Address Code</u>		Key field		

Description This position is used to store the default qualifier 1 for the Address code which is defined in the message definition. It can be used to identify the sender, ship-to warehouse and ship-to address.

Processing outgoing

EDI Sub-System None

ERP LN "ZZ"

Processing Incoming

EDI Sub-System

ERP LN This field will be filled with the constant value "ZZ".  
The field can be used as (first) qualifier on field  
tdsls312.ofbp (pos. 3); tdsls312.stad (pos. 12); tdsls312.stbp (pos. 19)

Position	19	Field Format	an..6	Field Status	M
Field Name	<u>Warehouse / Ship-To BP</u>		Key field		

Description This field contains the ship-to address code.

Processing outgoing

EDI Sub-System None

ERP LN The ship to address code from ERP LN table field tdpur320.cwar is mapped to this position. Conversion table is ecedi462.

Processing Incoming

EDI Sub-System Transmission of the value from the message file.

ERP LN It is mapped to tdsls312.stbp. Conversion table is ecedi328. Position 18 is used as qualifier 1.



## SA3 Sequence Shipping Details

**Status:** Mandatory  
**Frequency:** Multiple per Release  
**Description:** This data record contains all information of the Sequence Shipping Schedule and it is related to SA2.

SEQ In-house Format					Mapping from Application Table Fields (out)		Mapping to Application Table Fields (in)	
Pos	Field Description	Key	ST	FM	Table field	Action	Table field	Action
1	Kind of data record	O/I	M	an3	SA3		SA3	
2	Message Reference	O/I	M	an..35	ecedi701.bano	Generation (see below)	ecedi702.bano	Generation by EDI Sub-System
3	(Net) ID of Sender	O/I	M	an..17	ecedi020.neta	Conversion (see below)	tdsls312.ofbp	Conversion (see below)
4	Release No.	O/I	M	an..9	tdpur320.rln		tdsls312.crln	
5	Release revision	O/I	M	n..4	tdpur320.rlv		tdsls312.crlr	
6	Schedule		M	an..9	tdpur323.schn		tdsls316.schn tdsls316.cchn	
7	Schedule Position		M	n..4	tdpur321.spon		tdsls316.cchp	
8	Sequence Revision		M	n..4	tdpur323.seqr			
9	Job Sequence		M	n..9	tdpur317.jseq		tdsls316.jseq	
10	Vehicle ID		M	an..30	tdpur317.vino		tdsls316.vino	
11	Line Station		C	an..6	tdpur317.lsta			
12	Assembly Kit		C	an..15	tdpur317.akit		tdsls316.akit	
13	Item		M	an..47	tdpur317.item		tdsls316.item	Conversion
14	Qualifier Item Code		M	an..6	"SA"		"SA"	

SEQ In-house Format					Mapping from Application Table Fields (out)		Mapping to Application Table Fields (in)	
Pos	Field Description	Key	ST	FM	Table field	Action	Table field	Action
15	Reference ID		M	an..30	tdpur317.rfid		tdsls316.refe	
16	Requirement/ Receipt Date		M	n..22	tdpur317.rqdt		tdsls316.rdat	
17	Shipment Date		M	n..22	tdpur317.shdt		tdsls316.ddat	
18	Quantity		M	n..19	tdpur317.qoor		tdsls316qoor	
19	Purchase / Sales Unit		M	an..3	tdpur311.cupp	Conversion	tdsls316.cups	Conversion
20	Warehouse / Dock Location		M	an..9	tdpur311.cwar		tdsls316.dock	
21	Status		M		tdpur317.stat			
22	Qualifier Address Code		M	an..6	"ZZ"		"ZZ"	
23	Qualifier BP		M	an..6	"STBP"		"STBP"	
24	Warehouse / Ship-to-BP		M	an..9	tdpur310.cwar		tdsls311.stbp	Conversion
25								
26								
27	Buy-from BP / Sales Office		M	an..9	tdpur311.otbp	Conversion	tdsls311.cofc	Conversion
28	Purchase / Sales price		M	n..19	tdpur311.pric		tdsls316.price	
29	Tax code		M	an..9	tdpur311.cvat	Conversion	tdsls316.cvat	Conversion
30	Exempt Reason		C	an..6	tdpur311.rcod	Conversion	tdsls316.rcod	Conversion
31	Exempt certificate		C	an..20	tdpur311.ceno		tdsls316.ceno	
32	Price Unit		M	an3	tdpur311.cupp	Conversion	tdsls316.cups	Conversion
33	Release Position		M	n..4	tdpur323.rpon		tdsls308.cpon	
34	Exempt		C	an..6	tdpur311.exmt		tdsls316.exmt	
35	Tax country		M	an..3	tdpur311.ccty	Conversion	tdsls316.ccty	Conversion



SEQ In-house Format					Mapping from Application Table Fields (out)		Mapping to Application Table Fields (in)	
Pos	Field Description	Key	ST	FM	Table field	Action	Table field	Action
36	BP Tax Country		M	an..3	tdpur311.bptc	Conversion	tdsls316.bptc	Conversion
37								
38								
39								
40	Manufacturer		C	an..6	tdpur311.cmnf			
41	Preferred Manufacturer		C	an..35	tdpur311.mprn			
42	Delivery Point		C	an..9			tdsls316.dlpt	
45	Data Record End Sign	O/I	M	an7	SA3_END		SA3_END	

Detailed description: Sequence Shipping Schedule  
 Kind of data record: SA3 Sequence Shipping details

Position	1	Field Format	an3	Field Status	M
Field Name	<u>Kind of Data Record</u>		Key field Out / IN		
Description	This field identifies the kind of data record in the message block. It contains the constant value 'SA3'.				
Processing outgoing EDI Sub-System					
ERP LN	This field will be filled with the constant value 'SA3'.				
Processing Incoming EDI Sub-System	This field will be filled with the constant value 'SA3'.				
ERP LN	None				

Position	2	Field Format	an..35	Field Status	M
Field Name	<u>Message Reference</u>		Key field Out / IN		
Description	This field identifies all connected data records of one Sequence Shipping Schedule message. The numbering, which has to be clear by SEQ, helps to control the chronological order of the SEQ and the complete transmission.				
Processing outgoing EDI Sub-System					
ERP LN	Analogously to data record SA2				
Processing Incoming EDI Sub-System					
ERP LN	Analogously to data record SA2				

---

Position	3	Field Format	an..17	Field Status	M
Field Name	<u>(Net) ID of sender</u>		Key field Out / IN		
Description	This field contains the identification of the sender (for example the ILN Number)				
Processing outgoing EDI Sub-System	Transmission of the value from the message file.				
ERP LN	The identification is stored in the ERP LN table ecedi020 'Our Identification' under the corresponding network in the ERP LN table field ecedi020.neta. The contents of this field are mapped to the position of the transmission file. Here you can store the general ILN-Number for your customer.				
Processing Incoming EDI Sub-System					
ERP LN	The identification of the sender determines the corresponding business partner (customer) and the network in the table ecedi028 'Relations by network'. This identification is mapped to the ERP LN table field tdsls312.ofbp. Pos. 22 is used as first qualifier, pos. 23 as second qualifier.				

Position	4	Field Format	an..9	Field Status	M
Field Name	<u>Release Number</u>		Key field Out / IN		
Description	This field contains the origin Release Number of the related schedules.				
Processing outgoing EDI Sub-System	None				
ERP LN	The schedule's release number is mapped from ERP LN table field tdpur320.rln0 to this position.				
Processing Incoming EDI Sub-System	Transmission of the value from the message file.				
ERP LN	Mapping to ERP LN table field tdsls312.crln; the customer's release number.				

Position	5	Field Format	n..4	Field Status	M
Field Name	<u>Release Revision Number</u>		Key field Out / In		

Description This field contains the Release Revision Number.

Processing outgoing  
EDI Sub-System None

ERP LN The release revision number is mapped from ERP LN table field tdpur320.rlv to this position.

Processing Incoming  
EDI Sub-System Transmission of the value from the message file.

ERP LN Mapping to ERP LN table field tdsls312.crlr; customer's release revision.

Position	6	Field Format	an..9	Field Status	M
Field Name	<u>Schedule Number</u>				

Description This position contains the original Schedule Number

Processing outgoing  
EDI Sub-System None

ERP LN The schedule number is mapped from the ERP LN table field tdpur323.schn to this position.

Processing Incoming  
EDI Sub-System Transmission of the value from the message file.

ERP LN Mapped to table field tdsls316.cchn and the table field tdsls316.schn

Position	7	Field Format	n..4	Field Status	M
<b>Field Name</b>	<b><u>Schedule Position</u></b>				
Description	This position contains the Schedule Line Number				
Processing outgoing EDI Sub-System	None				
ERP LN	The schedule position is mapped from the ERP LN table field tdpur323.schn to this position.				
Processing Incoming EDI Sub-System	Transmission of the value from the message file.				
ERP LN	Mapped to table field tdsls316.cchp				

Position	8	Field Format	n..4	Field Status	M
<b>Field Name</b>	<b><u>Sequence Revision</u></b>				
Description	Together with the Schedule (position 6) and Schedule Position (position 7), this field identifies the revision number of the schedule line.				
Processing outgoing EDI Sub-System	None				
ERP LN	The sequence revision is mapped from the ERP LN table field tdpur323.seqr to this position.				
Processing Incoming EDI Sub-System					
ERP LN	N. A.				

Position	9	Field Format	n..9	Field Status	M
<b>Field Name</b>	<b><u>Job Sequence</u></b>				
Description	This field contains the job sequence number				
Processing outgoing EDI Sub-System	None				
ERP LN	The ERP LN table field tdpur317.jseq is mapped to this position.				
Processing Incoming EDI Sub-System	Transmission of the value from the message file				
ERP LN	Mapped to ERP LN table field tdsls316.jseq				

Position	10	Field Format	an..30	Field Status	M
<b>Field Name</b>	<b><u>Vehicle ID</u></b>				
Description	This field contains the Vehicle identification number (VIN).				
Processing outgoing EDI Sub-System	None				
ERP LN	The ERP LN table field tdpur317.vino is mapped to this position.				
Processing Incoming EDI Sub-System	Transmission of the value from the message file				
ERP LN	Mapped to ERP LN table field tds1s316.vino				

Position	11	Field Format	an..6	Field Status	C
<b>Field Name</b>	<b><u>Line Station</u></b>				
Description	This field contains the Assembly Line Station which refers to the ERP LN table field tias150.sttn, the assembly line's station.				
Processing outgoing EDI Sub-System	None				
ERP LN	The ERP LN table field tdpur317.lsta to this position.				
Processing Incoming EDI Sub-System					
ERP LN	N. A.				

Position	12	Field Format	an..15	Field Status	C
<b>Field Name</b>	<b><u>Assembly Kit</u></b>				
Description	This field identifies the assembly kit				
Processing outgoing EDI Sub-System	None				
ERP LN	The ERP LN table field tdpur317.akit is mapped to this position.				
Processing Incoming EDI Sub-System	Transmission of the value from the message file				
ERP LN	Mapped to ERP LN table field tds1s316.akit				

---

Position	13	Field Format	an..47	Field Status	M
Field Name	<u>Item</u>				

Description	This field contains the item code.
Processing outgoing EDI Sub-System	None
ERP LN	The item code from ERP LN table field tdpur317.item is mapped to this position.
Processing Incoming EDI Sub-System	Transmission of the value from the message file
ERP LN	Mapped to table fields tdsls311.item and tdsls316.item after conversion with qualifier 'SA'. Position 14 is used as qualifier.

Position	14	Field Format	an..6	Field Status	M
Field Name	<u>Qualifier Item Code</u>				

Description	This field contains the qualifier that can be used to identify the item. It will be filled with the constant value "SA"
Processing outgoing EDI Sub-System	None
ERP LN	"SA"
Processing Incoming EDI Sub-System	
ERP LN	This field will be filled with the constant value "SA".

Position	15	Field Format	an..30	Field Status	M
<b>Field Name</b>	<b><u>Reference ID</u></b>				
Description	This field contains the Reference ID which represents a combination of VIN, Line Station, and Assembly Kit.				
Processing outgoing EDI Sub-System	None				
ERP LN	The ERP LN table field tdpur317.rfid, Reference ID, is mapped to this position.				
Processing Incoming EDI Sub-System					
ERP LN	This field will be mapped to ERP LN table field tds1s316.refe				

Position	16	Field Format	n..22	Field Status	M
<b>Field Name</b>	<b><u>Requirement / Receipt Date</u></b>				
Description	This field contains the Date requiring the goods receipt.				
Processing outgoing EDI Sub-System	None				
ERP LN	The ERP LN table field tdpur317.rqdt is mapped to this position.				
Processing Incoming EDI Sub-System					
ERP LN	This field will be mapped to ERP LN table field tds1s316.rdat, the planned receipt date.				

---



Position	17	Field Format	n..22	Field Status	M
<b>Field Name</b>	<b><u>Shipment Date</u></b>				

Description This field contains the Date shipping the goods.

Processing outgoing  
EDI Sub-System None

ERP LN The ERP LN table field tdpur317.rqdt, is mapped to this position.

Processing Incoming  
EDI Sub-System Transmission of the value from the message file

ERP LN Mapped to ERP LN table field tds316.ddta, Delivery Date.  
This position is also mapped to table field tds316.sdat (Start Date) and tds316.edat (End Date).

Position	18	Field Format	n..19	Field Status	M
<b>Field Name</b>	<b><u>Quantity</u></b>				

Description This field includes the required quantity in purchase/sales unit referring to the schedule line.

Processing outgoing  
EDI Sub-System None

ERP LN This field is mapped from the ERP LN table field tdpur317.qoor to this position.

Processing Incoming  
EDI Sub-System Transmission of the value from the message file

ERP LN Mapped to table field tds316.qoor

Position	19	Field Format	an..3	Field Status	M
<b>Field Name</b>	<b><u>Purchase / Sales Unit</u></b>				

Description This field contains the item's purchase / sales quantity unit.

Processing outgoing  
EDI Sub-System None

ERP LN This field is mapped from ERP LN table field tdpur311.cuqp to this position after conversion by ERP LN table ecedi442. If conversion not found then original value will be sent.

Processing Incoming  
EDI Sub-System Transmission of the value from the message file

ERP LN Mapped to table field tdsIs316.cuqs after conversion by table ecedi304

Position	20	Field Format	an..9	Field Status	M
<b>Field Name</b>	<b><u>Warehouse/Dock Location</u></b>				

Description This field contains the final delivery point.

Processing outgoing  
EDI Sub-System

ERP LN The table field tdpur311.cwar is mapped to this position.

Processing Incoming  
EDI Sub-System Transmission of the value from the message file.

ERP LN Mapping to the ERP LN table field tdsIs316.dock.

Position	21	Field Format	an..9	Field Status	M
<b>Field Name</b>	<b><u>Status</u></b>				

Description This field identifies the general purpose of the data record.

Processing outgoing  
EDI Sub-System

ERP LN The ERP LN table field tdpur317.stat, Status, is mapped to this position. The following values are possible: 'Created' (1), 'Modified' (2), and 'Canceled' (3).

Processing Incoming  
EDI Sub-System

ERP LN N. A.

---

Position	22	Field Format	an..6	Field Status	M
<b>Field Name</b>	<b><u>Qualifier Address Code</u></b>				

Description This position is used to store the default qualifier 1 for the Address code which is defined in the message definition. It can be used to identify the sender, ship-to warehouse and ship-to address.

Processing outgoing  
EDI Sub-System

None

ERP LN

"ZZ"

Processing Incoming  
EDI Sub-System

ERP LN

This field will be filled with the constant value "ZZ".  
Field can be also used as (first) qualifier on fields tds316.cvat (pos. 29), tds311.cofc (pos. 27) and tds311.stbp (pos. 24)

Position	23	Field Format	an..6	Field Status	M
<b>Field Name</b>	<b><u>Qualifier Business Partner</u></b>				

Description This position is used to store the default qualifier 1 for the Address code which is defined in the message definition. It can be used to identify the sender, ship-to warehouse and ship-to address.

Processing outgoing  
EDI Sub-System

None

ERP LN

"STBP"

Processing Incoming  
EDI Sub-System

ERP LN

This field will be filled with the constant value "STBP".  
Field can be also used as (second) qualifier on field tds311.stbp (pos. 24)

Position	24	Field Format	an..9	Field Status	M
<b>Field Name</b>	<b><u>Warehouse / Ship-to BP</u></b>				
Description	This field identifies the customer's warehouse code for which the schedule is created.				
Processing outgoing EDI Sub-System	None				
ERP LN	The ERP LN table field tdpur310.cwar, Warehouse, is mapped to this position.				
Processing Incoming EDI Sub-System					
ERP LN	Mapped to ERP LN table field tdsls311.stbp, Ship-to Business Partner. After conversion table by table ecedi328. Position 22 is used as first and Position 23 is used as second qualifier.				

Position	27	Field Format	an..9	Field Status	C
<b>Field Name</b>	<b><u>Buy-from BP / Sales Office</u></b>				
Description	This field identifies the Buy-from BP who will deliver the goods or the responsible Sales Office to deliver the goods.				
Processing outgoing EDI Sub-System	None				
ERP LN	This field is mapped from the ERP LN table field tdpur311.otbp to this position and converted using the table ecedi468. If conversion not found then the original value will be sent.				
Processing Incoming EDI Sub-System	Transmission of the value from the message file				
ERP LN	The position is mapped to tdsls311.cofc after conversion using the table ecedi350. If conversion not found then the default sales office is filled either from Sold-to BP or user profiles.				

---

Position	28	Field Format	n..19	Field Status	M
<b>Field Name</b>	<b><u>Purchase / Sales Price</u></b>				

Description This field contains the item's purchase / sales price per price unit (pos. 32).

Processing outgoing

EDI Sub-System None

ERP LN This field is mapped from the ERP LN table field tdpur311.pric

Processing Incoming

EDI Sub-System

ERP LN Mapped to ERP LN table field tds1s316.pric, Price. The amount is calculated as price multiplied with quantity. Notes: discounts are not communicated through EDI. If you want to use the prices and discounts set up in the supplier's system, the price must be removed from the conversion setup.

Position	29	Field Format	an..9	Field Status	M
<b>Field Name</b>	<b><u>Tax Code</u></b>				

Description This field identifies the tax code.

Processing outgoing

EDI Sub-System None

ERP LN The tax code is mapped from ERP LN table field tdpur311.cvat to this position after conversion by ERP LN table ecedi446. If conversion not found then original value will be sent.

Processing Incoming

EDI Sub-System Transmission of the value from the message file.

ERP LN Mapping to the ERP LN table field tds1s316.cvat after conversion by table ecedi308.

Position	30	Field Format	an..6	Field Status	C
<b>Field Name</b>	<b><u>Exempt Reason</u></b>				

Description This field contains the tax exempt reason code.

Processing outgoing  
EDI Sub-System None

ERP LN The exempt reason is mapped from ERP LN table field tdpur311.rcod to this position after conversion with ERP LN table ecedi495.

Processing Incoming  
EDI Sub-System Transmission of the value from the message file.

ERP LN Mapping to the ERP LN table field tds1s316.rdoc after conversion with ERP LN table ecedi353.

Position	31	Field Format	an..20	Field Status	C
<b>Field Name</b>	<b><u>Exempt certificate</u></b>				

Description This field contains the tax exempt certificate number.

Processing outgoing  
EDI Sub-System None

ERP LN The exempt reason is mapped from ERP LN table field tdpur311.ceno to this position.

Processing Incoming  
EDI Sub-System Transmission of the value from the message file.

ERP LN Mapping to the ERP LN table field tds1s316.ceno

Position	32	Field Format	an..3	Field Status	M
<b>Field Name</b>	<b><u>Purchase / Sales Price Unit</u></b>				

Description This field contains the item's price unit.

Processing outgoing  
EDI Sub-System None

ERP LN This field is mapped from ERP LN table field tdpur311.cupp to this position after conversion by ERP LN table ecedi442.  
If this field is blank then the unit defined in the data record SA3 should be used. If conversion not found then original value will be sent.

Processing Incoming  
EDI Sub-System Transmission of the value from the message file

ERP LN Mapped to table field tds1s316.cups after conversion by table ecedi304

Position	33	Field Format	n..4	Field Status	M
<b>Field Name</b>	<b><u>Release Position</u></b>				

Description This field contains the Release Position.

Processing outgoing  
EDI Sub-System None

ERP LN The release position is mapped from the ERP LN table field tdpur311.rpon to this position

Processing Incoming  
EDI Sub-System Transmission of the value from the message file.

ERP LN It is mapped to field tds1s308.cpon

<b>Position</b>	<b>34</b>	<b>Field Format</b>	<b>an..6</b>	<b>Field Status</b>	<b>C</b>
<b>Field Name</b>	<b><u>Exempt</u></b>				

Description This field contains a qualifier if tax exemption applies or not.

Processing outgoing  
EDI Sub-System

ERP LN The exempt qualifier from ERP LN table field tdpur311.exmt is mapped to this position.

Processing Incoming  
EDI Sub-System Transmission of the value from the message file.

ERP LN Mapping to the ERP LN table field tds1s316.exmt.

<b>Position</b>	<b>35</b>	<b>Field Format</b>	<b>an..3</b>	<b>Field Status</b>	<b>M</b>
<b>Field Name</b>	<b><u>Tax Country</u></b>				

Description This field contains the country code which is linked to the tax code.

Processing outgoing  
EDI Sub-System None

ERP LN The tax country code is mapped from ERP LN table field tdpur311.ccty to this position after conversion with ERP LN table ecedi440.

Processing Incoming  
EDI Sub-System Transmission of the value from the message file.

ERP LN Mapping to the ERP LN table field tds1s316.ccty after conversion with ERP LN table ecedi302.

---



Position	36	Field Format	an..3	Field Status	M
<b>Field Name</b>	<b><u>BP Tax Country</u></b>				

Description	This field contains the tax country code of the Business Partner.
Processing outgoing EDI Sub-System	None
ERP LN	The business partner tax country code is mapped from ERP LN table tdpur311.bptc to this position after conversion with ERP LN table ecedi468.
Processing Incoming EDI Sub-System	Transmission of the value from the message file.
ERP LN	Mapping to the ERP LN table field tds1s316.bptc after conversion with ERP LN table ecedi328.

Position	40	Field Format	an..6	Field Status	C
<b>Field Name</b>	<b><u>Manufacturer</u></b>				

Description	This field contains the code of the good's supplier.
Processing outgoing EDI Sub-System	None
ERP LN	The code for the manufacturer from the ERP LN Table field tdpur322.cmf is mapped to this position.
Processing Incoming EDI Sub-System	
ERP LN	N. A.

Position	41	Field Format	an..35	Field Status	C
<b>Field Name</b>	<b><u>Preferred Manufacturer's Part Number</u></b>				

Description	The field contains the preferred manufacturer's part number for the item.
Processing outgoing EDI Sub-System	None
ERP LN	The code for the manufacturer's part number is mapped from the ERP LN Table field tdpur311.mprn to this position.
Processing Incoming EDI Sub-System	
ERP LN	N. A.

Position	42	Field Format	an..9	Field Status	C
<b>Field Name</b>	<b><u>Delivery Point</u></b>				

Description	This field contains the Delivery Point to which the supplier has to deliver the goods.
Processing outgoing EDI Sub-System	None
ERP LN	
Processing Incoming EDI Sub-System	Transmission of the value from the message file.
ERP LN	Mapping to the ERP LN table field tdsls316.dlpt.

Position	45	Field Format	an7	Field Status	M
<b>Field Name</b>	<b><u>Data Record end sign</u></b>				
Description	This field identifies the end of data record in the message block. It contains the constant value 'SA3_END'.				
Processing outgoing EDI Sub-System					
ERP LN	This field will be filled with the constant value 'SA3_END'.				
Processing Incoming EDI Sub-System	This field will be filled with the constant value 'SA3_END'.				
ERP LN	None				



---

## Chapter 3 Definitions, Acronyms, and Abbreviations

# 3

<b>Term</b>	<b>Description</b>
ANSI X12	American National Standards Institute Accredited Standards Committee X12; Standard definitions of American EDI Directories
BEM	Baan Electronic Message - abbreviated form of BEMIS used with the definition of the EDI organization
BEMIS	“BAAN Electronic Message Interchange System”; it is used for the ERP LN In-house EDI format
BP	Business Partner; used for Customer and Supplier
EDI	Electronic Data Interchange; electronic exchange of documents in standard formats
EDIFACT	Electronic Data Interchange for Administration, Commerce and Transport; Standard definitions of United Nations Directories
GLN	Global Location Number, a thirteen digit number used to identify legal entities, trading parties and locations.
ID	Identification
ILN	International Location Number; see GLN
MRL	Material Release
SEQ	Shipping Sequence Schedule
SHP	Shipping Schedule
VDA	The German Association of the Automotive Industry; Standard definitions of German EDI Directories

---



---

# Appendix A Sample File

A

## Example Outgoing message

```
"SA1";"zvt2007020100000000006";"etcnet";;"SEQ001";"BEMIS";"";"EDI000195";20070205154000;;  
"SA1_END"
```

```
"SA2";"zvt2007020100000000006";"etcnet";"EDI000195";1;3;;;;;"ADD000043";"DEL";"ACTUAL";2007020  
5150000;20070206190000;20070205154000;ZZ;"ETCS00001";"SA2_END"
```

```
"SA3";"zvt2007020100000000006";"etcnet";"EDI000195";1;ZVS00039;50;;test16;654340;;"  
ETBACK1";SA;ref95;20070205150000;20070202190000;12;"pcs";;;ZZ;"ETCS00001";;"SOBER1";;  
EXPORT;;;"";;"WHAMS1";"SA3_END"
```

```
"SA3";"zvt2007020100000000006";"etcnet";"EDI000195";1;ZVS00039;50;;test16;654340;;"  
ETBACK1";SA;ref96;20070206150000;20070206190000;12;"pcs";;;ZZ;"ETCS00001";;"SOBER1";;  
EXPORT;;;"";;"WHAMS1";"SA3_END"
```

---

